

## **WO200174223**

Publication Title:

WO200174223

Abstract:

Abstract not available for WO200174223

Data supplied from the esp@cenet database - Worldwide

-----  
Courtesy of <http://v3.espacenet.com>

*This Patent PDF Generated by Patent Fetcher(TM), a service of Stroke of Color, Inc.*

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
11 October 2001 (11.10.2001)

PCT

(10) International Publication Number  
**WO 01/74223 A1**

(51) International Patent Classification<sup>7</sup>: A47K 3/28, 3/30

John [NZ/NZ]; 133 Diana Drive, Glenfield, Auckland (NZ).

(21) International Application Number: PCT/NZ01/00050

(22) International Filing Date: 4 April 2001 (04.04.2001)

(74) Agents: PARK, A., J. et al.; 6th Floor, Huddart Parker Building, Post Office Square, P.O. Box 949, Wellington 6015 (NZ).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
503755 4 April 2000 (04.04.2000) NZ

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(71) Applicant (*for all designated States except US*):  
KOHLER NEW ZEALAND LIMITED [NZ/NZ];  
133 Diana Drive, Glenfield, Auckland (NZ).


(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): HATRICK-SMITH,

[Continued on next page]

(54) Title: A PRE-PLUMBED SHOWER DOOR SYSTEM

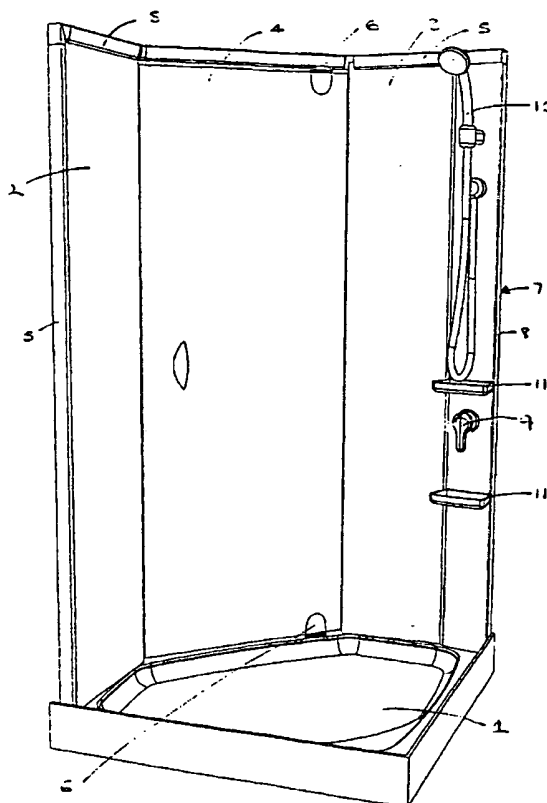

(57) Abstract: A shower door system in knocked down from including: a door (4) and optionally one or more return panels (2, 3) for forming a shower enclosure, having a pre-installed shower mixer valve (14) mounted in a frame member (7) of the shower door system, a pre-installed shower rose (10) or shower rose connection fitting mounted in a frame member (7) of the shower door system and pre-installed plumbing from the mixer valve (14), within a frame member (7) or members, to the shower rose (10) or shower rose connection fitting, so that when the shower door system is subsequently assembled and installed against a wall, or in a corner between two walls, to form a shower enclosure with a frame member (7) adjacent a wall, water supply plumbing to the shower (9, 10, 14) may pass from the wall directly to the frame member (7) to connect to the shower mixer valve (14).

WO 01/74223 A1



IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

**A PRE-PLUMBED SHOWER DOOR SYSTEM****FIELD**

- 5 The invention comprises a shower door system which may be sold incorporating a mixer for the shower and a shower rose and associated plumbing pre-installed in frame members of the shower door system.

**BACKGROUND**

10

A shower door system including a door and return or in-fill panels on one or both sides of the door, is typically positioned against a wall in a bathroom or washroom or similar or in a corner between two walls, to form a shower enclosure. The complete enclosure comprises a shower base, the shower door system comprising a transparent or  
15 translucent glass or non-glass or opaque door and return or in-fill panel(s), and the wall or walls of the bathroom.

20

Typically to install the enclosure first hot and cold water pipes are plumbed into one of the bathroom walls to a mixer valve which is mounted in the wall, and a pipe from the mixer valve up to a plumbing fitting to receive a shower rose is installed. The shower  
base is fitted in position and then the wall lining and then the panels and door of the shower door system are installed, and then a fascia plate and control handle or knob of the mixer valve and the shower rose are fitted in position.

25

**SUMMARY OF INVENTION**

The invention provides an improved or at least alternative form of shower door system. The shower door system is intended to be sold in knocked down form incorporating a pre-installed mixer and shower rose or shower rose connection fitting.

30

In broad terms in one aspect the invention comprises a shower door system in knocked down form including a door and optionally one or more return panels for forming a shower enclosure, including a pre-installed shower mixer valve mounted in a frame member of the shower door system, a pre-installed shower rose or shower rose

connection fitting mounted in a frame member of the shower door system, and pre-installed plumbing from the mixer valve, within a frame member or members, to the shower rose or shower rose connection fitting, so that when the shower door system is subsequently assembled and installed against a wall or in a corner between two walls  
5 to form a shower enclosure with a frame member adjacent a wall, water supply plumbing to the shower may pass from the wall directly to the frame member to connect to the shower mixer valve.

Preferably the knocked down shower door system also includes pre-installed plumbing  
10 from the mixer valve, within a frame member or members, and to the exterior of a face of a said frame member which will be adjacent a wall when the shower door system is assembled and installed.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

15 The invention is further illustrated by the preferred forms thereof which are shown in the accompanying drawings by way of example and without intending to be limiting. In the drawings:

20 Figure 1 is a view of one preferred form of shower door system of the invention from the interior,

Figure 2 is a view similar to Figure 1 of another preferred form shower door system of the invention,

25 Figure 3 is a view similar to Figures 1 and 2 of a further preferred form shower door system of the invention,

Figure 4 is a cross-section view of one form of frame member formed by two extruded  
30 parts and in which a mixer valve is pre-installed,

Figure 5 is a view of the frame member of Figure 4 but with one side of the frame member removed,

Figure 6 is a cross-section view of another form of frame member formed by two extruded parts and in which a mixer valve is pre-installed, and

Figure 7 is a cross-section view of the frame member of Figure 6 in exploded form.

5

#### DETAILED DESCRIPTION OF PREFERRED FORMS

The shower door system of Figure 1 is shown on a shower base 1 and comprises return or in-fill panels 2 and 3 and a pivoting door 4, all of which are mounted within a frame 10 5 which is typically formed of extruded aluminium components. The door 4 comprises a panel mounted by pivots 6 so that the door may be opened outwardly of the enclosure. The door and return panels are typically formed from clear or translucent glass but may be formed from a non-glass material such as polycarbonate for example or an opaque material.

15

On one side the shower door system incorporates a hollow vertical member 7 which also forms part of the frame of the shower door system. In a preferred form the hollow member 7 is formed by two vertically extending extruded aluminium components. The hollow member 7 extends from the shower base 1 to the top of the frame as shown, and 20 along an inner side edge retains the vertical edge of glass panel 3. The face or edge 8 of the member 7 when the shower door system is assembled and installed in position will abut a wall of the bathroom in which the shower door system is installed to form a shower enclosure. The frame member 7 mounts on the interior side of the shower enclosure the control handle 9 or knob of a shower mixer valve, and a shower rose 10 25 which may be of any type. The member 7 may also optionally mount shelves and/or flannel hoops or rails 11.

Figure 4 shows one form of such a hollow frame member 7 in cross section, which is formed by two longitudinally extended extrusions which may typically be aluminium 30 extrusions but could alternatively be formed of a plastics material for example. One extrusion 12 forms the side of the hollow member 7 on the interior of the shower enclosure while the other extrusion 13 is on the exterior of the shower enclosure. The web which forms the side face 8 is formed on one of the extrusions as shown. The extrusions come together at the opposite edge 16 to retain the vertical edge of glass

panel 3 using a conventional rubber or plastic insert 17. Mixer valve 14 is positioned within the internal cavity of the frame member 7 and a pipe (not visible in Figure 4) extends upwardly from the mixer valve 14 to a shower rose such as that indicated at 10 in Figure 1, or shower rose connection fitting into which a shower rose may be screwed once the shower door system has been installed. An aperture 15 is provided in the side face 8 through which hot and cold water pipes may pass directly from the bathroom wall into the interior of the frame member 7 and to the mixer valve 14.

Typically to install the shower door system to form a shower enclosure first a shower base 1 is fitted in position, in the case of the shower door system shown in Figure 1 in the corner between two walls of a bathroom or similar. A wet lining or tiling or similar is installed over the bathroom walls before or after the frame and glass panels of the shower door system are assembled and installed (or may be pre-existing within the bathroom or washroom). During installation of the glass panels and door and supporting frame the extrusion 12 including web 8 is secured to the wall by screwing through the web 8 into the wall surface framing behind the wall lining, through holes 18 (see Figures 4 and 5). At this stage the other half extrusion 13 of the hollow member 7 has not yet been installed, to allow access to the interior of the hollow member 7. In relation to plumbing in the bathroom wall it is necessary to provide only hot and cold water pipes which may pass through aperture 15 in the side face 8 of the frame member 7 to be coupled to the mixer valve 14. When installation of the shower door system is complete the other half extrusion 13 of the frame member 7 is fitted in place to complete the installation.

With the shower door system of the invention it is not necessary to fit a shower mixer and rose and plumbing between the mixer and rose into the wall of the bathroom before the wall is lined. Rather the shower mixer and rose and plumbing may be sold as part of the shower door system ready for installation, minimising what is subsequently required to install the shower door system on site.

Typically the shower door system will be sold in knocked down form including the hollow frame member 7 incorporating a pre-installed shower mixer and rose and associated plumbing within the cavity of the frame member 7. The associated plumbing will generally include a pipe from the mixer valve to the shower rose or at

least a shower rose connection fitting, and may also optionally include flexible hot and cold water connection pipes from the shower mixer valve ready to be connected directly to hot and cold water pipes in the wall, for example. The mixer valve will typically have a control handle or knob such as that indicated at 9 in Figure 4 fitted in place at the time of sale or the shower door system may simply be sold with the mixer valve pre-installed with instructions to the installer to fit the control lever or knob to the mixer valve, and optionally the shower rose, as one of the final steps of installation of the shower enclosure.

In the preferred forms shown the mixer is installed in a frame component which will lie adjacent and abut a wall when the shower door system is installed but this is not essential and in an alternative arrangement the mixer valve may be installed in a frame component of the shower door system which does not lie adjacent a wall in the installed enclosure, and the plumbing will then pass from the wall into and through one or more hollow frame members of the shower door system to the mixer valve. The shower rose or shower rose connection fitting may be mounted in the same frame member as the mixer valve or a different frame member.

Figure 5 is a view similar to Figure 4 of the hollow member 7 of Figure 4 but with the extrusion 13 removed, being that half extrusion which will normally form the side of the hollow member 7 on the exterior of the shower enclosure. In this embodiment the vertical edge of the glass panel 3 is fixed to the other half extrusion 12 by clips 19 which will securely retain the glass panel 3 in place prior to installation of the other half extrusion 13.

Figure 2 shows another preferred form of shower door system which is largely identical to that of Figure 1 except that the door 4 is curved as shown.

Figure 3 shows a further form of shower door system of the invention which is again very similar to that of Figure 1 except that the shower door system of Figure 3 is square in shape and comprises door 4 and return wall 2. The door is pivoted at 6 and instead of retaining a vertical edge of panel 3 as in Figures 1 and 2, in the shower door system of Figure 4 the inner vertical edge 16 of the hollow frame member 7 mounts a vertical seal against which the edge 4a of the door will seal when the door is closed.



Figures 6 and 7 show in cross-section another form of frame member for a shower door system of the invention, in assembled form in Figure 6 and with parts exploded in Figure 7. In Figures 6 and 7 in general similar reference numerals indicate similar parts as in Figures 4 and 5. This form of frame member is again composed of two longitudinally extending components which are typically extruded aluminium components, and which inter-engage when assembled together to form the frame member. The two extruded components may be designed so as to snap fit together but alternatively in the frame member structure of Figures 6 and 7 screw fastening components 20 spaced along the length of the extrusion pass through one half extrusion and thread into a female threaded part retained in a web 21 forming part of the other half extrusion. Again there are two half extrusions, one component 12 which forms the side of the frame member on the interior of the shower enclosure and another 13 which forms the side of the frame member on the exterior of the enclosure. The extrusions come together to retain the edge of a panel 3 via rubber or plastic insert 17. A face 8 of extrusion 12 will after installation of the shower door system lie adjacent a wall and hot and cold pipes may extend from the wall through an aperture in the face 8 and into the interior of the frame component to connect to the mixer valve 14. Alternatively in the knocked down shower door system for sale hot and cold connection pipes may be pre-installed which extend from the mixer valve 14 to or through an aperture in the face 8 or similar. In the embodiment of Figures 6 and 7 the component 12 which forms the interior side of the frame member is curved in shape as shown which conveniently orients the mixer so that the control handle or knob of the mixer faces into the interior of the installed shower enclosure as shown at an angle to panel 3 of the shower door system.

In the preferred forms described above the hollow frame member 7 which mounts the shower mixer and rose and internal plumbing is formed by two half extrusions which fit together to form the hollow frame member but alternative constructions are possible. For example the hollow member 7 could be formed of three extruded components and it is not necessary that the components forming the hollow member 7 be formed by extrusion or of aluminium and for example plastic or other materials may be used.

The foregoing describes the invention including preferred forms thereof and alterations and modifications as will be obvious to those skilled in the art are intended to be incorporated within the scope hereof as defined in the accompanying claims.

**CLAIMS**

1. A shower door system in knocked down form including a door and optionally one or more return panels for forming a shower enclosure, including a pre-installed shower mixer valve mounted in a frame member of the shower door system, a pre-  
5 installed shower rose or shower rose connection fitting mounted in a frame member of the shower door system, and pre-installed plumbing from the mixer valve, within a frame member or members, to the shower rose or shower rose connection fitting, so that when the shower door system is subsequently assembled and installed against a  
10 wall or in a corner between two walls to form a shower enclosure with a frame member adjacent a wall, water supply plumbing to the shower may pass from the wall directly to the frame member to connect to the shower mixer valve.
2. A shower door system according to claim 1 also including pre-installed  
15 plumbing from the mixer valve, within a frame member or members, and to the exterior of a face of a said frame member which will be adjacent a wall when the shower door system is assembled and installed.
3. A shower door system according to claim 2 wherein said frame member which  
20 will be adjacent a wall when the shower door system is assembled and installed includes an external face, an internal face towards the interior of the enclosure, one side face which will lie adjacent a wall when the shower door system is installed, and a face or edge opposite said one side face and which is adapted to retain an edge of a glass or non-glass panel of the shower door system or which provides a vertical seal for  
25 a door of the shower.
4. A shower door system according to any one of claims 1 to 3 wherein the mixer valve is mounted in a frame member which will be adjacent a wall when the shower door system is assembled and installed.
- 30 5. A shower door system according to any one of claims 1 to 3 wherein the mixer valve is mounted in a frame member which will be adjacent a wall when the shower door system is assembled installed, with an orientation such that the mixer control

handle or knob will face into the interior of the shower enclosure at an angle to a panel of the shower door system which is retained by said frame member.

5 6. A shower door system according to any one of claims 1 to 5 wherein the mixer valve and the shower rose or shower rose connection fitting are both mounted in a frame member which will be adjacent a wall when the shower door system is assembled and installed.

10 7. A shower door system according to any one of claims 1 to 6 wherein the or each frame member(s) in which the pre-installed mixer valve and shower rose or shower rose connection fitting are mounted comprise two longitudinally extending inter-engaging parts which are assembled together to form the frame member.

15 8. A shower door system according to any one of claims 1 to 7 which when assembled and installed provides a door or a wall including a door, and a return wall which extends at an angle to the door or wall including a door.

20 9. A shower door system according to any one of claims 1 to 7 which when assembled and installed provides a door and return walls on either side of the door.


10. A shower door system ready for sale and installation, in assembled or knocked down form, including a hollow member at one side for mounting a mixer for the shower and a shower rose and so positioned that when the assembled shower door system is installed against a wall or in a corner between two walls, the hollow member will be adjacent a wall so that water supply plumbing to the shower may pass from the wall directly into the interior of the hollow member to connect to the shower mixer.

30 11. A shower door system according to claim 10 wherein the hollow member is also a frame member of the shower door system and extends generally vertically for the full height of the shower door system and comprises an external face, an internal face within the interior of the enclosure, and a side face which will lie adjacent a wall when the shower door system is installed, and a face or edge opposite the side face which retains an edge of a glass panel of the shower door system or provides a vertical seal for a door of the shower.


12. A shower door system according to claim 11 incorporating a pre-installed mixer valve and shower rose or shower rose connection fitting and associated plumbing pre-installed in said hollow frame member.

5


1/7

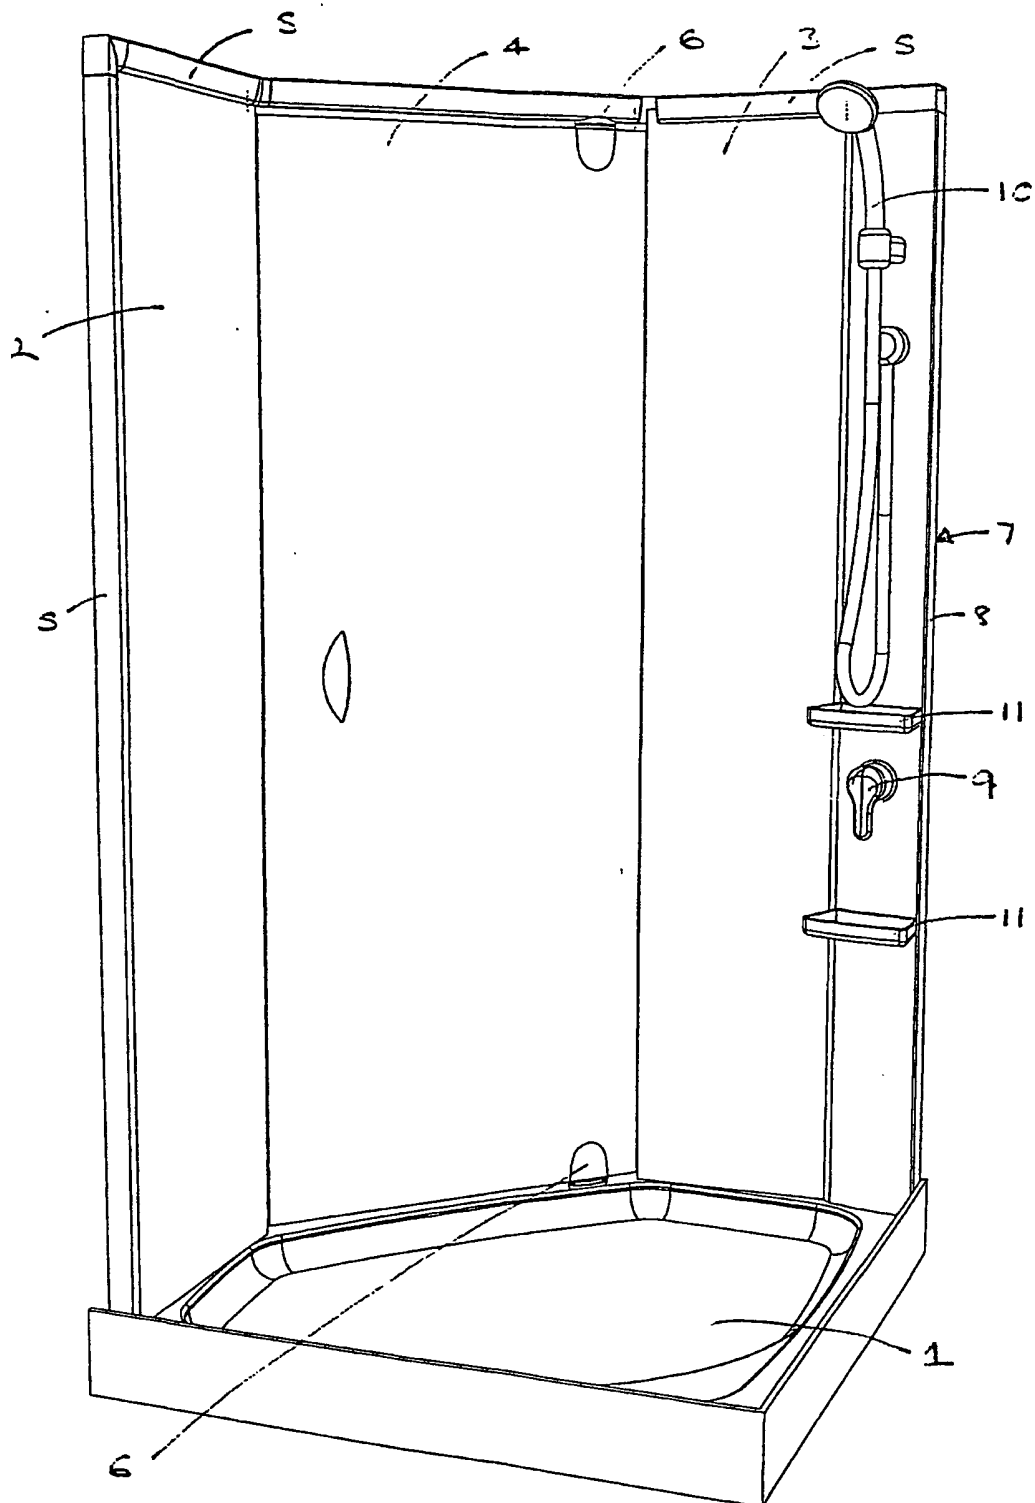

### Figure 1

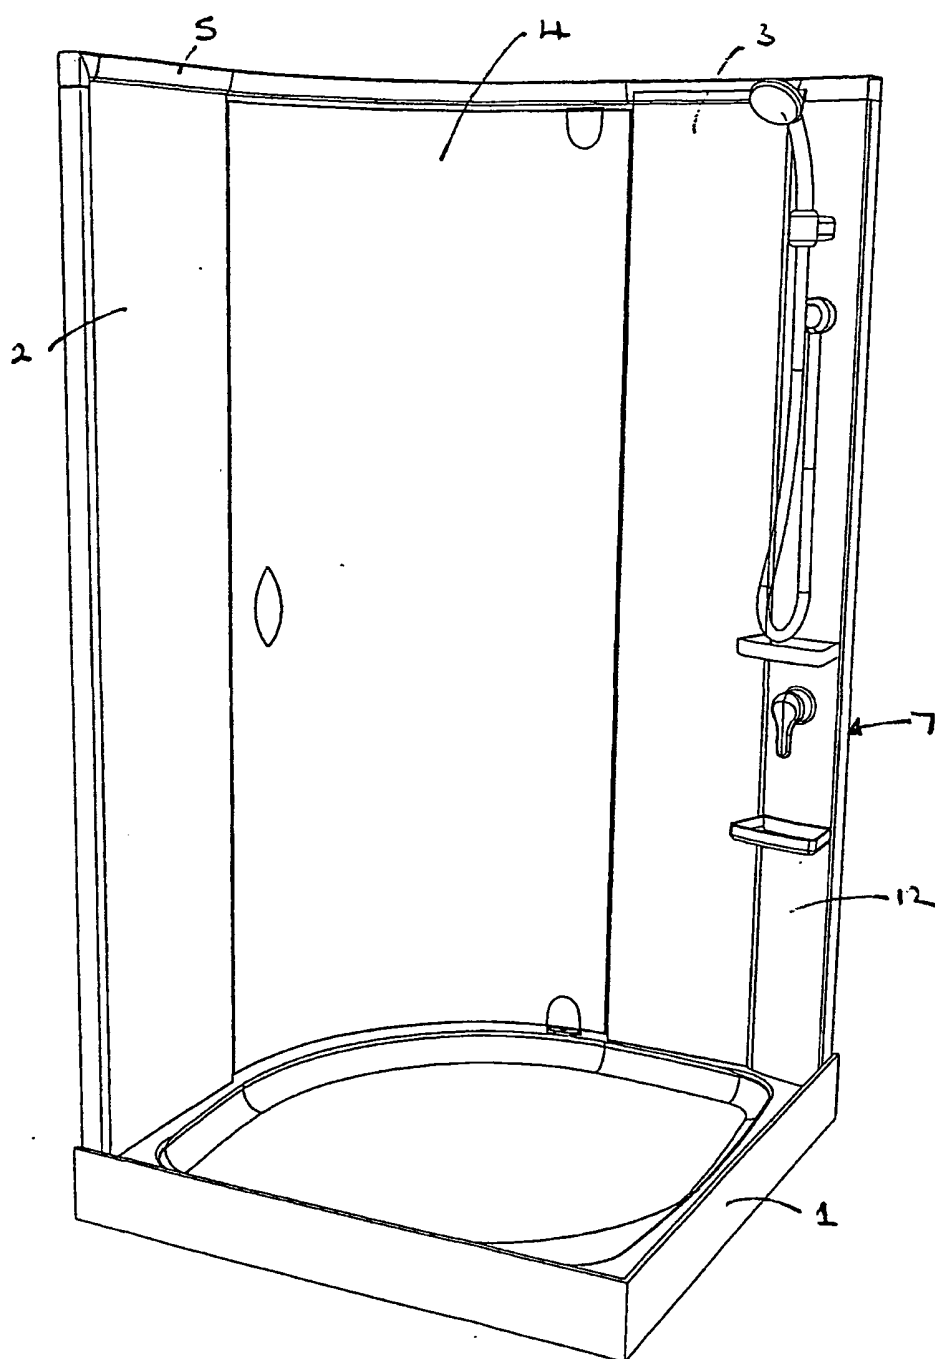
**Figure 2**

3/7

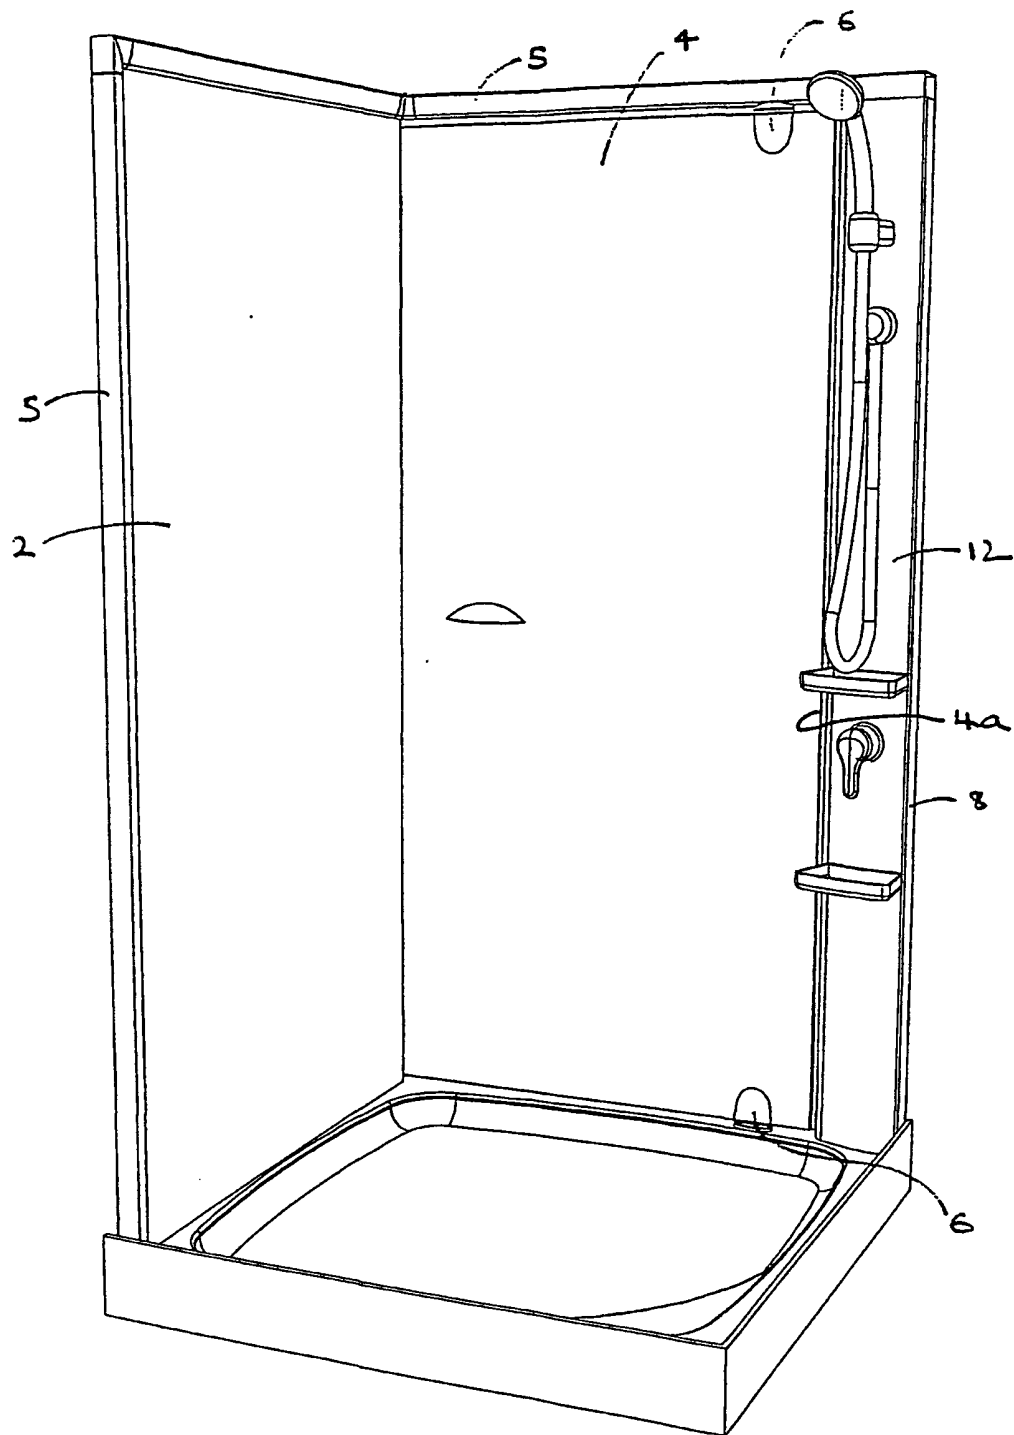**Figure 3**




4/7

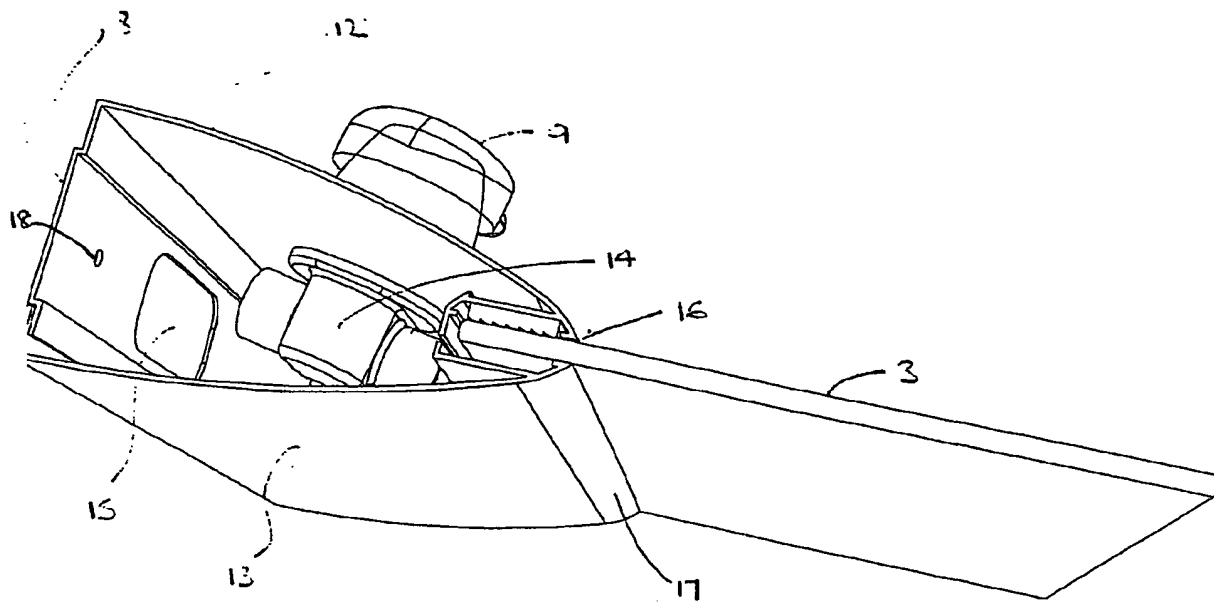

**Figure 4**

5/7

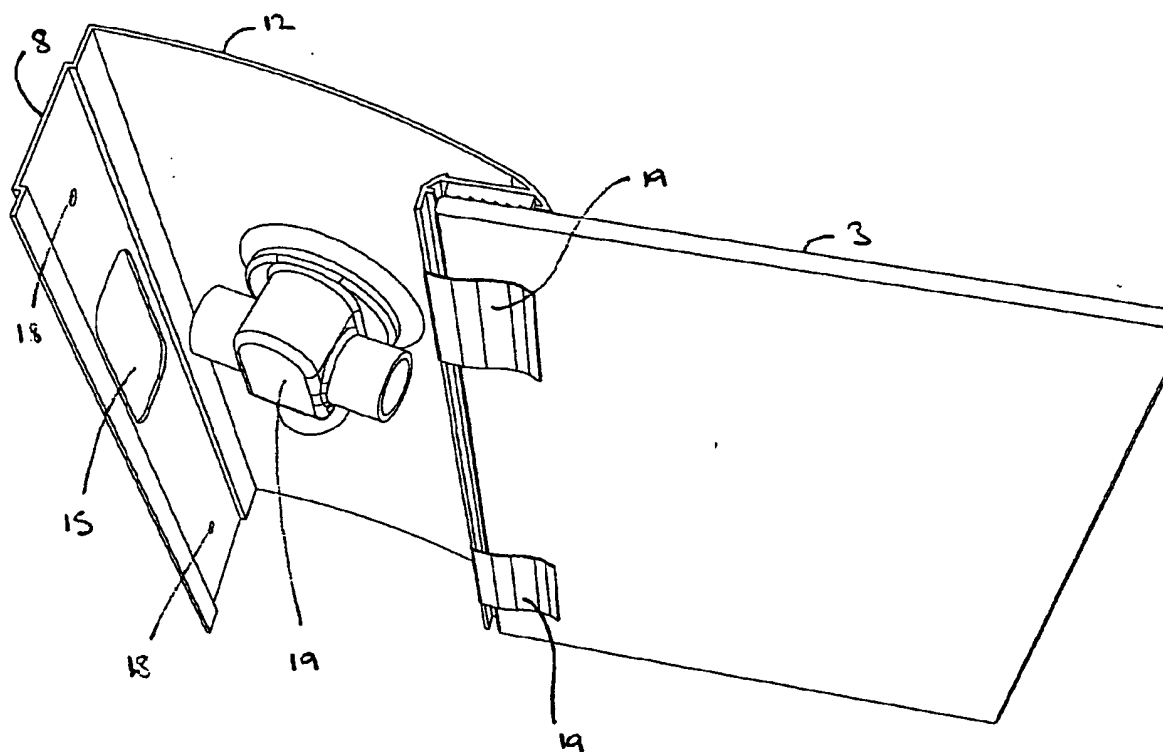

**Figure 5**

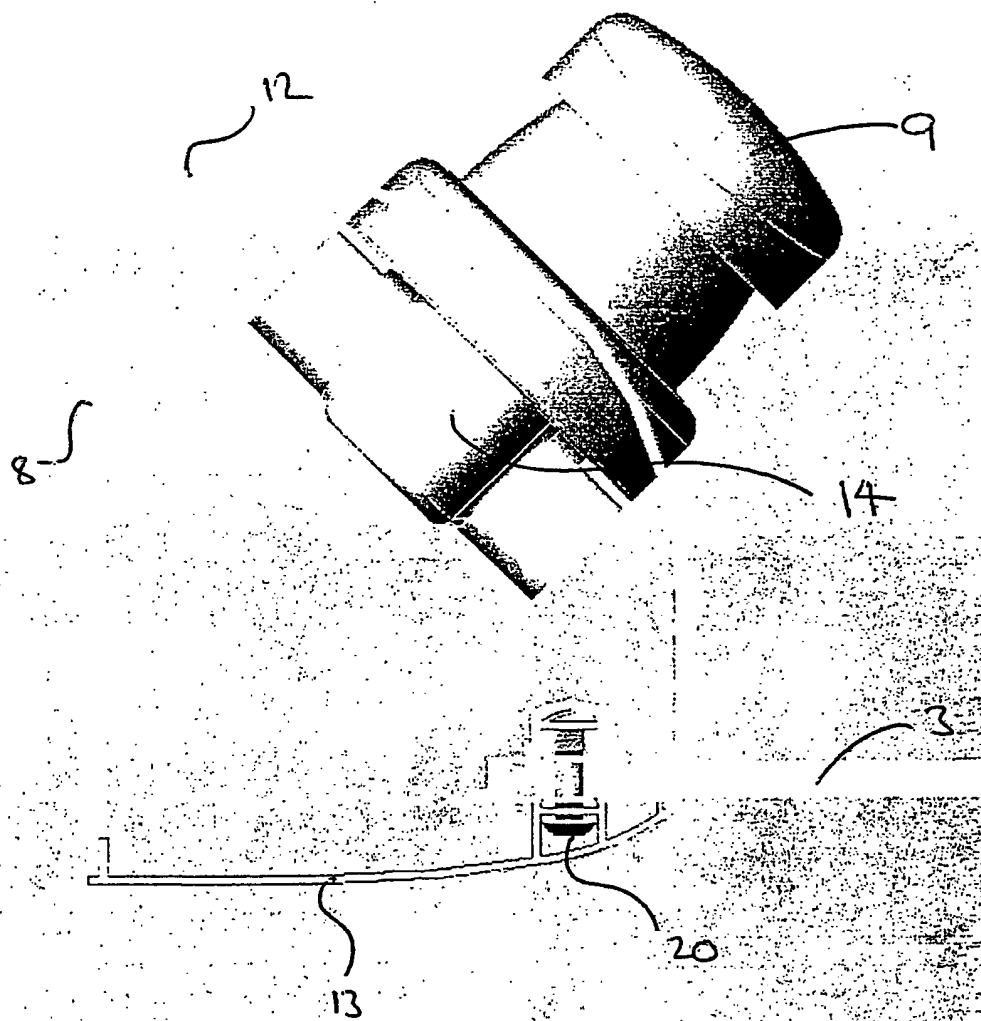


FIGURE 6

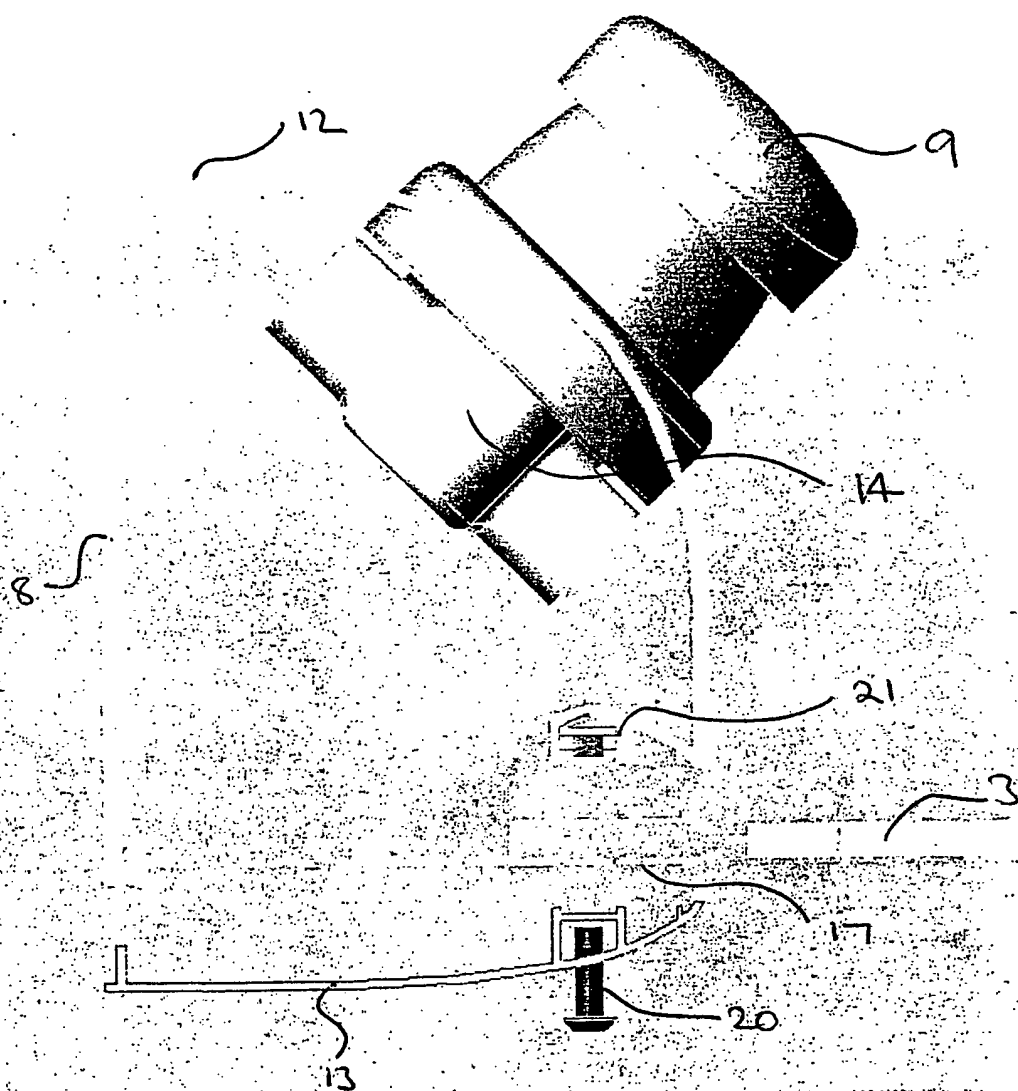



FIGURE 7

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/NZ01/00050

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>		
Int Cl <sup>7</sup> : A47K 3/28, 3/30		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols) IPC: A47K 3/28, 3/30		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) WPAT: IPC A47K 3/22 and keywords "door", "wall"; A47K 3/28, 3/30		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5070549 A (CAMPE) 10 DECEMBER 1991 See whole document	1,4-6,8,10
X	EP 348653 A (CESANA) 3 January 1990 See whole document	1,4-6,8,10
X	EP 960592 A (HUEPPE) 1 December 1999 See whole document	1,4-6,8,10
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C <input checked="" type="checkbox"/> See patent family annex		
<p>* Special categories of cited documents:</p> <p>"A" Document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&amp;" document member of the same patent family</p>		
Date of the actual completion of the international search 31 July 2001		Date of mailing of the international search report 7 August 2001
Name and mailing address of the ISA/AU AUSTRALIAN PATENT OFFICE PO BOX 200 WODEN ACT 2606 AUSTRALIA E-mail address: pct@ipaustalia.gov.au Facsimile No.: (02) 6285 3929		Authorized Officer  B.R. DASHWOOD Telephone No.: (02) 6283 2121

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/NZ01/00050

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2702138 A (ALGUE) 9 September 1994 See whole document	1,4-6,8,10
P,X	WO 200062656 A (IDO KYLPYHUONE) 26 October 2000 See whole document	1,2,4-6,9,10
A	EP 415058A (KERMI) 6 March 1991	
A	DE 3137406 A (MISAWA) 7 April 1983	

## INTERNATIONAL SEARCH REPORT

### Information on patent family members

International application No.  
PCT/NZ01/00050

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Document Cited in Search Report			Patent Family Member		
US	5070549	NONE			
EP	348653	NONE			
EP	960592	DE	19842915		
FR	2702138	EP	663806	WO	9420007
WO	200062656	AU	200039681		
EP	415058	DE	3928728		
DE	3137406	NONE			
END OF ANNEX					